




DICK SMITH
DESIGNED FOR AUSTRALIA

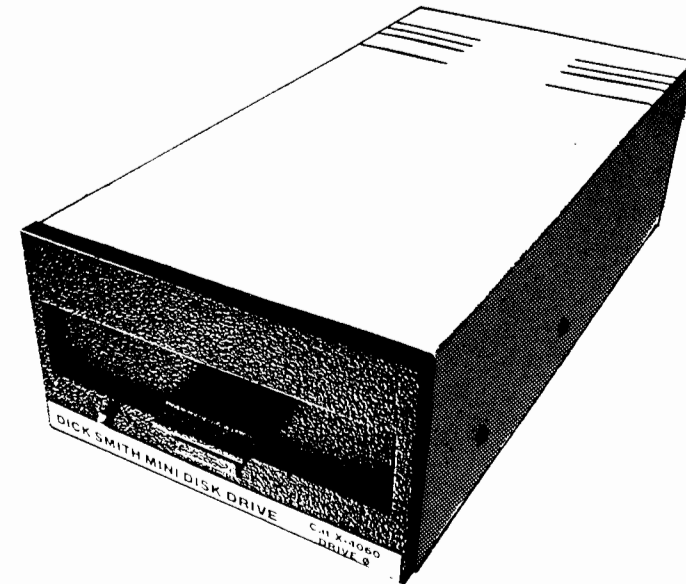

DICK SMITH ELECTRONICS

NSW 145 Parramatta Rd	AUBURN 648 0558	VIC 399 Lonsdale St	MELBOURNE 67 9834
T55 Terrace Level	BANKSTOWN SQ. 707 4888	260 Sydney Rd	COBURG 383 4455
613 Princes Hwy	BLAKEHURST 546 7744	656 Bridge Rd	RICHMOND 428 1614
552 Oxford St	BONDI JUNC. 387 1444	Springvale & Dandenong Rds	SPRINGVALE 547 0522
818 George St	BROADWAY 211 3777	205 Melbourne Rd	GEE LONG 78 6766
531 Pittwater Rd	BROOKVALE 93 0441	Ross Smith Ave & Nepean Hwy	FRANKSTON 783 9144
147 Hume Hwy	CHULLORA 642 8922	293 Adelaide St	BRISBANE 229 9377
162 Pacific Hwy	GORE HILL 439 5311	166 Logan Rd	BURANDA 391 6233
396 Lane Cove Rd	NORTH RYDE 888 3200	842 Gympie Rd	CHERMSIDE 58 6255
30 Grose St	PARRAMATTA 683 1133	60 Wright St	ADELAIDE 212 1962
6 Bridge St	SYDNEY 27 5051	435 Main North Rd	ENFIELD 260 6088
125 York St	SYDNEY 290 3377	Main South & Flagstaff Rds	DARLINGTON 298 8977
173 Maitland Rd	TIGHES HILL 61 1896	414 William St	PERTH 328 6944
263 Keira St	WOLLONGONG 28 3800	Wharf St & Albany Hwy	CANNINGTON 451 8666
Tamworth Acde & Kable Ave	TAMWORTH 66 1961	25 Barrack St	HOBART 31 0800
ACT 96 Gladstone St	FYSHWICK 80 4944	Mail Order Centre: PO Box 321, North Ryde 2113. Ph: (02) 888 3200	

MINIFLOPPY DISK DRIVE INSTALLATION GUIDE

INSTALLATION & MAINTENANCE GUIDE FOR DISK DRIVES

DESCRIPTION


The X-4060/61 series disk drives have a storage capacity of up to 100K bytes with single density (FM) recording and 183K bytes with double density (MFM) recording. The units are designed to be connected to the Dick Smith System 80 Computer in conjunction with the X-4020 expansion unit but are also suitable for use with many other systems.

The X-4060 is ready configured as Drive 0 (your first drive) and the X-4061 is configured as Drive 1 (your second drive).


INSTALLATION

1. The X-4060/61 is simply fitted to the System 80 expansion unit via the X-3232 Daisy Chain Cable. The drive power cable is connected to a 240V 50Hz power outlet.
2. A basic single drive configuration may be expanded using additional X-4061 drives. The X-4061 is pre-configured as a Drive 1 and as such is not fitted with termination resistors. It must therefore be connected between Drive 0 (an X-4060) and the System 80 expansion box.



NOTE: The X-4061 must not be the only drive present.

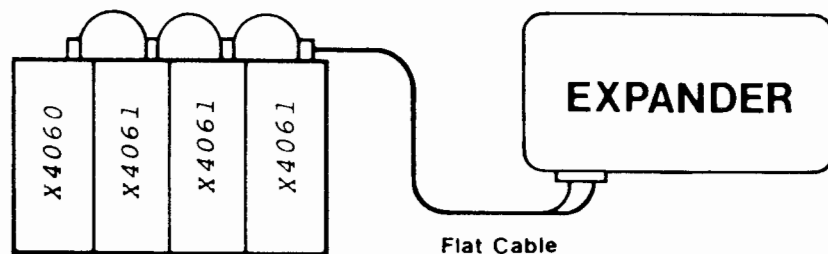

3. Further expansion beyond two drives is provided by using the X-4061 reconfigured as Drive 2 and/or Drive 3 (your third or fourth drives). A DIP switch is provided for this purpose. To select a drive, slide the switch to the ON position returning any previously selected switch to OFF.



CONNECTIONS

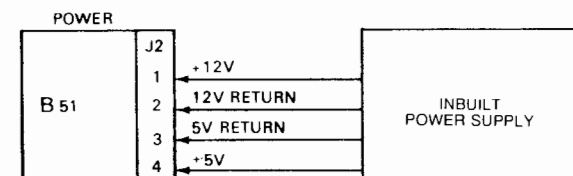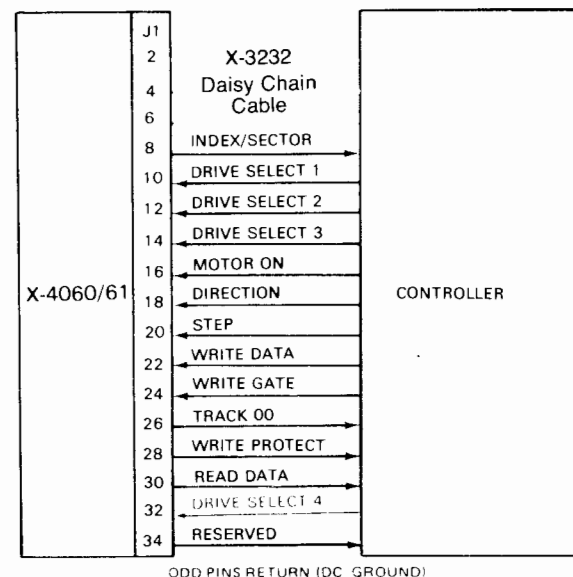

PREVENTATIVE MAINTENANCE:

This unit was designed and manufactured in Australia for Dick Smith Electronics Pty Ltd (Incorporated in NSW), and requires little maintenance.

Head Cleaning.

To clean the drive head, we recommend that you use the X-3516 Head Cleaning kit. It is recommended that you clean your disk heads once a month.